

NORMACONNECT® V QRC



为快速组装及快速拆卸独家设计的头部闭合结构

- ✓ 螺纹耳轴可实现单手组装
- ✓ 与螺栓连接相比更加轻便
- ✓ 适用于稍微超出公差的花兰

 进气系统

 排气系统


 冷却系统

 燃油系统

 涡轮增压器

 固定和紧固

NORMACONNECT® V QRC

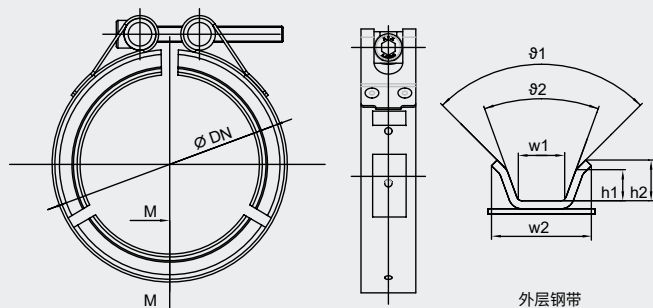

应用

V型QRC卡箍用于排气系统的不同部位以及涡轮增压器，拥有良好的耐腐蚀性能。

材料

部分：	W3	W4	W5
卡槽和钢带	1.4510	1.4301	1.4571
螺钉：	A2-70/A4-80		
耳轴：	1.4305		

零件号	描述	Ø 直径 (mm)	包装数量 (个)	钢带尺寸					
				w1 (mm)	w2 (mm)	h1 (mm)	h2 (mm)	ϑ1	ϑ2
NORMACONNECT® V QRC									
06330580077	V-QRC 077 096	77	100	6.6	-	4.7	-	40°	-
06330578077	V-QRC 077 869	77	100	8.2	17.0	4.0	-	40°	-
06330579080	V-QRC 080 897	80	50	4.5	13.6	5.8	7.5	40°	70°
06330577080	V-QRC 080 2-0121	80	50	8.7	-	5.8	7.6	40°	90°
06332633082	V-QRC 082 0885	82	50	4.3	13.6	4	7.0	40°	-
06330576085	V-QRC 085 908	85	50	9.0	-	7.0	-	40°	-
06330575097	V-QRC 097 099	97	50	7.9	-	5.2	-	40°	-
06333633098	V-QRC 098 917	98	50	8.8	-	5.4	7.5	40°	90°
06330574103	V-QRC 103 097	103	50	6.5	-	3.6	5.05	40°	90°
06332633108	V-QRC 108 0884	108	50	13.6	-	4.0	7.0	40°	-
06334633112	V-QRC 112 015/P	112	30	6.5	-	7.8	-	40°	-
06332633115	V-QRC 115 933	115	50	7.9	-	5.4	7.8	40°	90°
06330571124	V-QRC 124 094	124	50	6.5	-	4.6	-	40°	-
06334633131	V-QRC 131 110/N4	131	50	6.5	20.0	7.2	-	40°	-
06334633135	V-QRC 135 015/P	135	50	6.5	-	7.8	-	40°	-
06331633143	V-QRC 143 101.D4	143	30	7.9	-	5.8	7.5	40°	90°
06334633145	V-QRC 145 015/P	145	50	6.5	-	7.8	-	40°	-
06334633146	V-QRC 155 110/N4	146	25	6.5	20.0	7.2	-	40°	-
06330572152	V-QRC 152 009	152	35	9.2	-	6.8	-	40°	-
06331633152	V-QRC 152 124/B5	152	30	7.9	-	5.8	7.0	40°	90°
06334633155	V-QRC 155 015/P	155	25	6.5	-	7.8	-	40°	-
06332633179	V-QRC 179 101 D4	179	50	7.9	-	5.3	7.5	40°	90°
06331633185	V-QRC 185 124/B5	185	30	7.9	-	5.8	7.5	40°	90°
06324632317	V-QRC 317	317	30	7.9	-	5.8	7.5	40°	90°
NORMACONNECT® V STC （可靠的耳轴密封结构）									
06322632219	V-STC 219 101	219	30	7.9	-	5.8	7.5	40°	90°
06324632404	V-STC 404 P 015	404	40	6.5	-	7.8	-	40°	-



您有定制需求或者进一步的技术交流需求吗？

请随时联系我们的汽车事业部！热线：+44 1635 574 005

欲了解更多关于汽车市场产品的信息，请访问我们的网站 norma-aftermarket.com

