


Hi-Torque



Extremely strong clamp for fixing solutions

- ✓ Reusable, secure and reliable installation
- ✓ Easy to retighten in cases of expansion (due to temperature fluctuations)
- ✓ No loss of material when installing
- ✓ Hi-Torque constant safety buckle which is keeping the band aligned to avoid damages

Hi-Torque

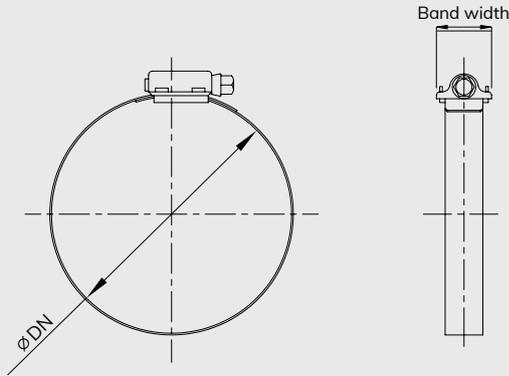

Applications

Hi-Torque is well suited to applications involving poly and braided tubing that require a complete seal, e.g. for:

- Heavy duty sealing applications
- Fluid transfer

Material

Group	W4
Band, housing and screw	Stainless steel – AISI 304

Additional sizes and materials might be available on request. Please get in touch with us!

Band Width (mm)	Description	Clamping Range Ø DN (mm)	Part Number	Packaging Quantity (pcs)
16	Hi-Torque 32-67	32 – 67	0560 6610 050	400
16	Hi-Torque 54-105	54 – 105	0560 6610 080	200
16	Hi-Torque 102-156	102 – 156	0560 6610 129	130
16	Hi-Torque 156-232	156 – 232	0560 6610 194	75
16	Hi-Torque 229-384	229 – 384	0560 6610 307	50

Technical Benefits

- ✓ Screw housing for easy tightening
- ✓ 'In-line' housing, which enables every thread on the worm to engage with the band
- ✓ A flexible safety buckle keeps the band constantly aligned
- ✓ Perforated band
- ✓ Safety buckle, keeping the band aligned

The Hi-Torque Clamp is part of our broad portfolio. Discover more hose fasteners and other products on our new Mobility website: mobility.normagroup.com

Do you have questions or require a personal consultation?
 Feel free to contact our NORMA Team!
 Visit our website for more information about our products: mobility.normagroup.com