


AccuSeal / AccuSeal TT



Durable sealing performance for slotted overlap style joint exhaust systems

- ✓ Simple, effective way to connect exhaust system components
- ✓ Unique 360° seal and high clamp loads are provided without permanent distortion to exhaust members
- ✓ Provides joint serviceability
- ✓ Durable installation without damage to pipe ends
- ✓ Pre-formed with pre-attached hardware for easy installation
- ✓ AccuSeal exhaust clamps are installed as original parts in many vehicles from leading automotive manufacturers

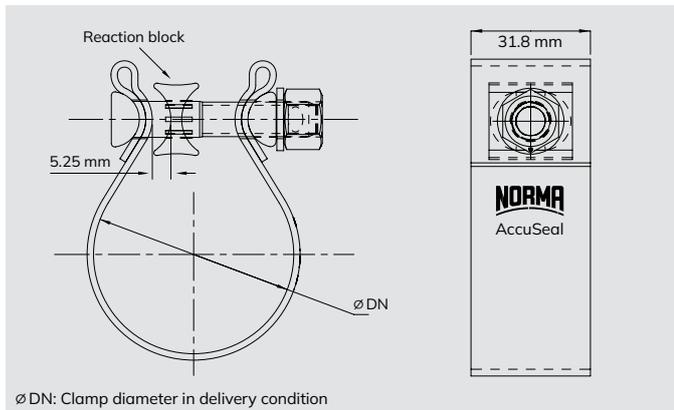

Ø DN: Clamp diameter in delivery condition

Applications

- AccuSeal clamps are used to join two overlapping exhaust pipes in center and rear end sections of passenger and commercial vehicles. Recommended for pipe with a wall thickness between 1.2 and 1.6mm.
- Assembled, serviceable joint for use on a slotted rigid pipe
- Pipes, mufflers and converters
- The version AccuSeal TT is used to join thin exhaust pipes in rear and center sections of passenger and commercial vehicles. Recommended for pipes with a wall thickness less than 1.2mm.

Materials

Group	W1, W3, W4
-------	------------

Additional sizes and materials might be available on request. Please get in touch with us!

Part Number	Description	Clamp Diameter in Delivery Condition (Ø DN in mm)	Material	Packaging Quantity (pcs)
0366 6100 564	AccuSeal 564	56.40	W1	50
0366 6100 629	AccuSeal 629	62.90	W1	50
0366 6100 656	AccuSeal 656	65.60	W1	50
0366 6100 689	AccuSeal 689	68.90	W1	50
0366 6110 706	AccuSeal 706	70.60	W1	50
0366 6100 949	AccuSeal 949	94.90	W1	50
0366 6121 072	AccuSeal 1072	107.20	W1	50
0366 6101 582	AccuSeal 1582	158.20	W1	25
0366 6100 476	AccuSeal 476	47.60	W3	50
0366 6100 506	AccuSeal 506	50.60	W3	50
0366 6100 520	AccuSeal 520	52.00	W3	50
0366 6100 549	AccuSeal 549	54.90	W3	50
0366 6110 564	AccuSeal 564	56.40	W3	50
0366 6110 606	AccuSeal 606	60.60	W3	50
0366 6120 629	AccuSeal 629	62.90	W3	50
0366 6110 649	AccuSeal 649	64.90	W3	50
0366 6110 656	AccuSeal 656	65.60	W3	50
0366 6100 691	AccuSeal 691	69.10	W3	50
0366 6120 706	AccuSeal 706	70.60	W3	50
0366 6000 756	AccuSeal 756	75.60	W3	50
0366 6120 818	AccuSeal 818	81.80	W3	50
0366 6110 949	AccuSeal 949	94.90	W3	50
0366 6111 072	AccuSeal 1072	107.20	W3	50
0366 6101 326	AccuSeal 1326	132.60	W3	50
0366 6111 582	AccuSeal 1582	158.20	W3	50
0366 6120 506	AccuSeal 506	50.60	W4	50
0366 6120 556	AccuSeal 556	55.60	W4	50
0366 6120 606	AccuSeal 606	60.60	W4	50
0366 6110 626	AccuSeal 626	62.60	W4	50
0366 6120 656	AccuSeal 656	65.60	W4	50
0366 6130 706	AccuSeal 706	70.60	W4	50
0366 6100 756	AccuSeal 756	75.60	W4	50
0366 6100 816	AccuSeal 816	81.60	W4	50
0366 6001 327	AccuSeal 1327	132.70	W4	50

Looking for the right AccuSeal? Contact us!

For best leakage performance choose the right AccuSeal. Selecting the correct AccuSeal depends on various parameters, including diameter, thickness and material of both male and female exhaust pipes. Please contact the NORMA Sales Team or the sales representative of your distributor with the above details (Figure 3) to select the right AccuSeal clamp for your application.

Figure 1 SealSlot design


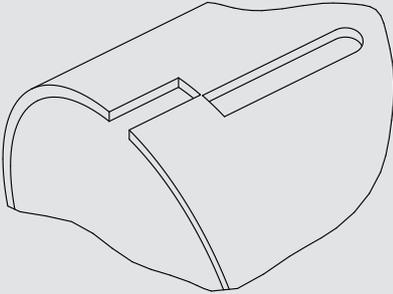



Figure 2 Example of exhaust pipes – AccuSeal assembly configuration

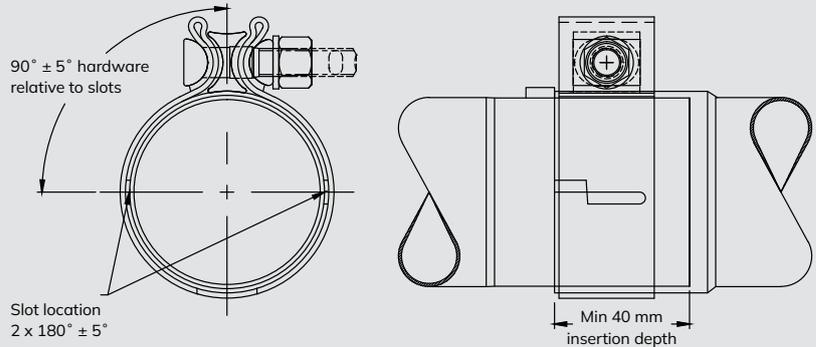

Notes

- ✓ For optimal sealing performance, the AccuSeal clamp should be used with SealSlot design (Figure 1). Please contact us for details of the SealSlot design.
- ✓ Use a two-slot system for best leakage performance. We recommend two symmetrical slots oriented at 90° on either side from the center of the reaction block (Figure 2).
- ✓ For good leakage performance of the AccuSeal joint, use a minimum insertion depth of 40 mm (Figure 2).

Figure 3 Required information to select the right AccuSeal clamp

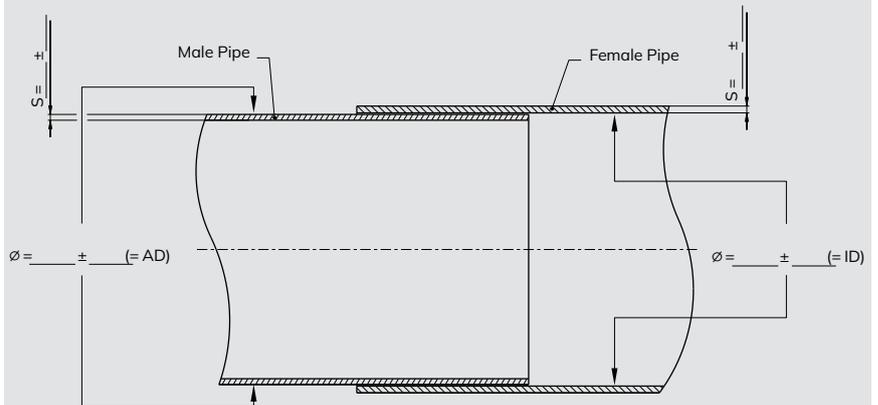

Technical Benefits

- ✓ High-strength fastener hardware with corrosion-resistant coating on semi-finished parts
- ✓ Reaction block serves as a defined stop, avoiding pipe deformation
- ✓ Exhaust connections are serviceable and easy to disassemble
- ✓ Clamp available in different materials to cover a broad range of exhaust pipes
- ✓ Integrated gasket

AccuSeal / AccuSeal TT are part of our broad portfolio. Discover more pipe connectors and other products on our new Mobility website: mobility.normagroup.com



Do you have questions or require a personal consultation?
 Feel free to contact our NORMA Team!
 Visit our website for more information about our products: mobility.normagroup.com